

# DOWNLIGHT

## SPECIFICITÀ

- Directly illuminates light downwards, providing bright and concentrated lighting effects, suitable for the lighting needs of specific areas.
- The installation is simple and can be installed directly on the ceiling without the need for an independent support structure, thus saving indoor space.
- High light efficiency, low energy consumption



L'illuminazione degli spazi

commerciali

FARETTI DA SUPERFICIE



CSL001-S



CSL002-S





**KOSOON®**

I downlight a plafone sono spesso utilizzati in luoghi commerciali, come negozi, ristoranti, sale espositive, ecc. che possono fornire buoni effetti di illuminazione e contribuire a creare un'atmosfera commerciale.

Le marcature arancioni sono cliccabili

- IP **20**
- PF **0.9**
- UGR **≤22-≤28**

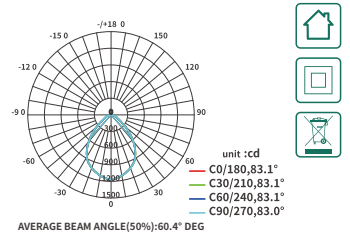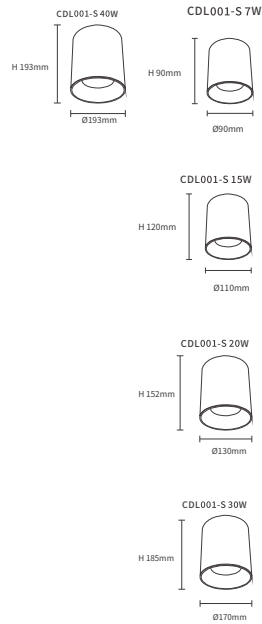

## CDL001-S

Lumen 480lm/510lm/1200lm/1250lm  
 1760lm/1780lm/2100lm/2250lm  
 2960lm/2980lm

Potenza 7W/15W/20W/30W/40W

PF 0.9

CCT 3000K / 4000K

CRI ≥90

Angolo 60°

UGR ≤22

Dimensioni Φ90\*H90mm/Φ110\*H120mm  
 Φ130\*H152mm/Φ170\*H185mm  
 Φ193\*H193mm

Colore Bianco

Voltaggio Input 220V-240V

Protezione IP IP20

Garanzia 3 Anni

Certificazione CE, RoHS



SKU	Potenza	CTT	Lumen	Dimensioni
<a href="#">D1001</a>	7W	3000K	480lm	Φ90*H90mm
<a href="#">D1002</a>	7W	4000K	510lm	Φ90*H90mm
<a href="#">D1003</a>	15W	3000K	1200lm	Φ110*H120mm
<a href="#">D1004</a>	15W	4000K	1250lm	Φ110*H120mm
<a href="#">D1005</a>	20W	3000K	1760lm	Φ130*H152mm
<a href="#">D1006</a>	20W	4000K	1780lm	Φ130*H152mm
<a href="#">D1007</a>	30W	3000K	2100lm	Φ170*H185mm
<a href="#">D1008</a>	30W	4000K	2250lm	Φ170*H185mm
<a href="#">D1009</a>	40W	3000K	2960lm	Φ193*H193mm
<a href="#">D1010</a>	40W	4000K	2980lm	Φ193*H193mm

Le marcature arancioni sono cliccabili



**CDL001-S**




**CDL002-S**

Le marcature arancioni sono cliccabili


- IP 20
- PF 0.9
- UGR ≤22-≤24




CDL002-S 10W





CDL002-S 20W



CDL002-S 30W



CDL002-S 40W

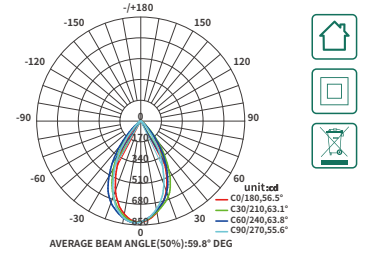

### CDL002-S

Lumen 830lm/850lm/1760lm/1780lm  
 2300lm/2320lm/3830lm/3860lm  
 Potenza 10W/20W/30W/40W  
 PF 0.9  
 CCT 3000K / 4000K  
 CRI ≥90  
 Angolo 60°  
 UGR ≤24/≤23  
 Dimensioni 90\*H90mm/110\*H120mm  
 130\*H135mm/160\*H165mm  
 Colore Bianco  
 Voltaggio Input 220V-240V  
 Protezione IP IP20  
 Garanzia 3 Anni  
 Certificazione CE, RoHS



SKU	Potenza	CTT	Lumen	Dimensioni
D1101	10W	3000K	830lm	90*H90mm
D1102	10W	4000K	850lm	90*H90mm
D1103	20W	3000K	1760lm	110*H120mm
D1104	20W	4000K	1780lm	110*H120mm
D1105	30W	3000K	2300lm	130*H135mm
D1106	30W	4000K	2320lm	130*H135mm
D1107	40W	3000K	3830lm	160*H165mm
D1108	40W	4000K	3860lm	160*H165mm